


Pink Hopeful Heart Necklace

Project N526
Designer: Kathy Mannix

Old fashioned style heart necklace made with a Swarovski crystal heart and silver plated brass.

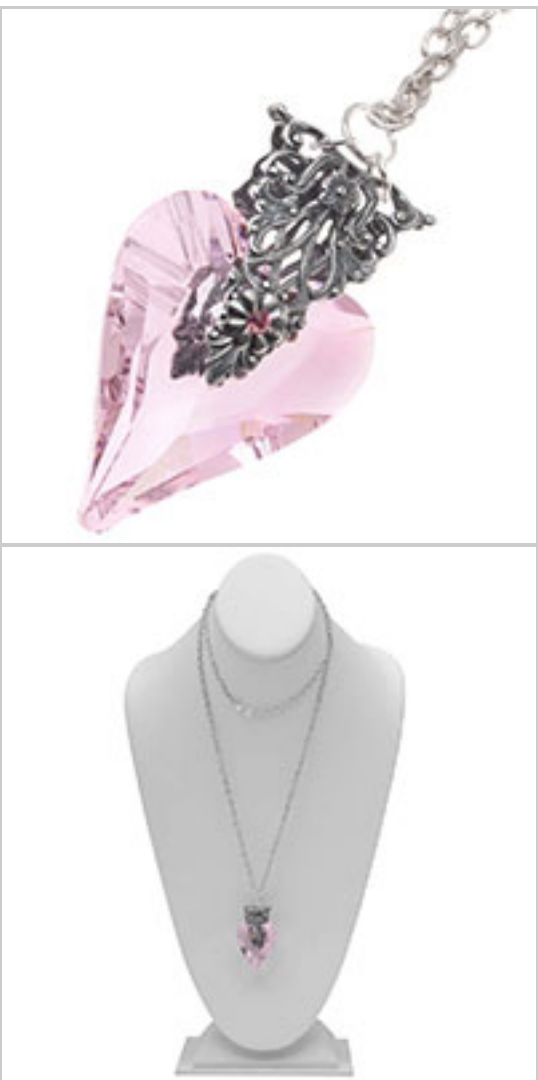

What You'll Need

- SWAROVSKI ELEMENTS Crystal #6240 Wild Heart Pendant 37mm Rosaline (1)
SKU: SWBB-3758
Project uses 1 piece
- Antiqued Silver Plated Diamond Trellis Filigree Stamping 64x21mm (1)
SKU: PND-5709
Project uses 1 piece
- SWAROVSKI ELEMENTS Flatback Crystal Rhinestone #2028 Xilion SS9 Light Rose (72)
SKU: SWF-10980
Project uses 1 piece
- Antiqued Silver Plated Lovely 6mm Daisy Bead Caps (6)
SKU: BMB-3450
Project uses 2 pieces
- Silver Plated Open Jump Rings 6mm 19 Gauge (x100)
SKU: FJR-5160
Project uses 3 pieces
- Sterling Silver Open Jump Rings 8mm 18 Gauge Heavy (10)
SKU: FJR-03089
Project uses 1 piece
- Nunn Design Antiqued Nunn Design Silver Plated Textured Cable Chain By The Ft
SKU: CHA-9805
Project uses 3 feet
- Artistic Craft Wire Silver Plate Non Tarnish 24 Ga 10Yd
SKU: WCR-2430
Project uses 6 inches
- Sterling Silver Straight Lobster Clasps 11.5mm (2)
SKU: FCL-02213
Project uses 1 piece
- E6000 Industrial Strength Glue Adhesive (0.18 fl oz)
SKU: XTL-1054
Project uses 1 piece

Specialized Tools

- Wubbers Bail Making Jewelry Pliers - Medium 3mm & 5mm Size
SKU: XTL-0031
- Rubber Bench Block 4 x 4 Inches - Base for Steel Block
SKU: XTL-0254
- Solid Metal Bench Block - Wire Hardening and Wire Wrapping Tool
SKU: XTL-6092
- Eurotool Hammer Rubber Mallet For Metal Smithing - 8 Ounces
SKU: XTL-0247

Instructions:

1. Bend in half the brass diamond trellis filigree stamping (PND-5709) using the small part of the bail making pliers (XTL-0031).
2. Align the tips of the filigree bail with the hole of the Swarovski heart (SWBB-3758). You will see 2 small holes on the tips of the filigree piece.
3. Cut a piece of 24 gauge wire (WCR-2430) 6 inches in length. Fold the wire in half. Thread one of the sides of the wire through one of the filigree holes, the swarovski heart, and through the adjacent filigree hole on the other side. Thread the other side of the wire through the other hole of the filigree, the Swarovski heart, back through the other side of the adjacent filigree hole. Now twist the wires together, just like a twist tie on a loaf of bread. This will tighten the bail closed over the heart. Cut off excess wire, leaving about an 1/8th of an inch of the twisted wire. Tuck the twisted wire through one of the sides of the filigree hole using your chain nose pliers.
4. Place one of the bead caps (BMB-3450) on top of the 4x4 steel block (XTL-6092). Flatten the bead cap with a rubber mallet (XTL-0247). Place a small dap of glue (XTL-1053) on the flattened bead cap. Place the bead cap on top of the filigree bail covering the piece of wire. Glue a Swarovski rhinestone (SWF-10980) on top of the bead cap to cover the small hole. Repeat this entire step for the back of the filigree (see photo).
5. Open one of the smaller jump rings (FJR-5160). Link through the one side of the top of the filigree bail. Close jump ring. Repeat these steps with the other small jump ring (see photo).
6. Open a plain medium jump ring (FJR-3089). Link through the two smaller jump rings on the bail. Close jump ring.
7. Open the plain large jump ring (FJR-5331). Link through the plain medium jump ring on the assembled piece. Close jump ring.
8. Thread the chain through the plain large jump ring from the assembled piece.
9. Open a plain medium jump ring. Thread through one of the end links of the chain and they clasp (FCL-2213). Close jump ring.
10. Open another plain medium jump ring. Thread through the other end link of the chain. Close jump ring. You're finished!

Please refer to photo for more detailed information about this project?